

PYRO



protect



Discover the simple way to safe fire insulation.

CHALFANT

OBO Bettermann Group


This is how the insulation works during a fire.

100 °F

Protection against fire and smoke

If there is a fire, the combination of foam blocks and fire protection foam creates an insulating carbon foam. This closes even the smallest openings, preventing the direct spread of fire and smoke.

www.chalfant-obo.com/pyro

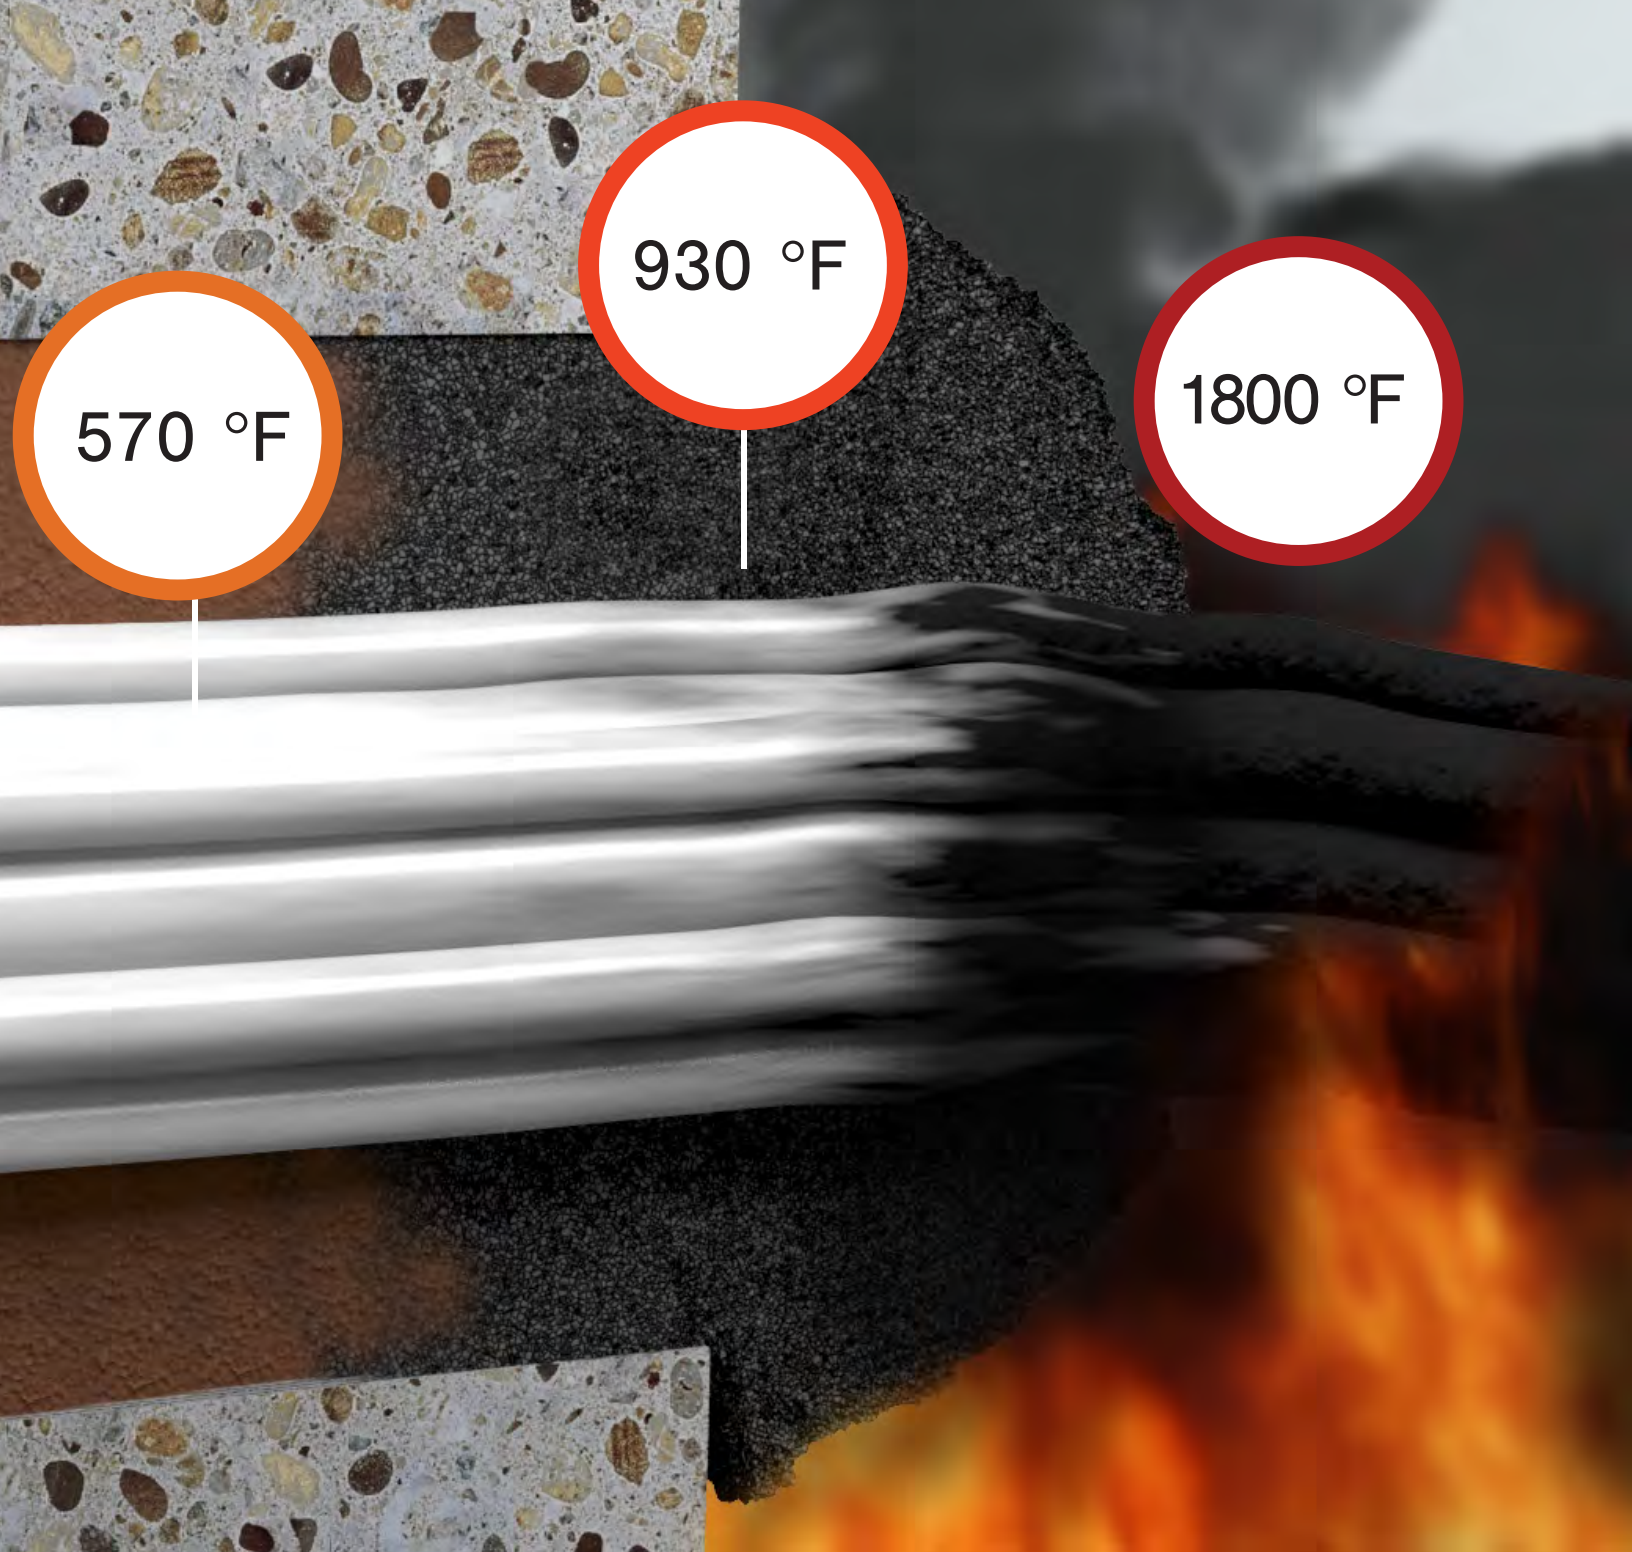

570 °F

930 °F

1800 °F

The compact OBO PYROPLUG® Block can fill large openings quickly. The block is soft and easy to work with, and can be installed lengthwise or in a transverse direction. OBO has even increased the size of the new generation of the PYROPLUG® Block, meaning fewer units are required per opening.

Fewer units per opening: Work more economically!



1st

The Task

Close openings safely

2nd


The Solution

Chalfant PYROPLUG® BI
PYROSIT® NG

3rd

The Result


A closed, fireproof
opening

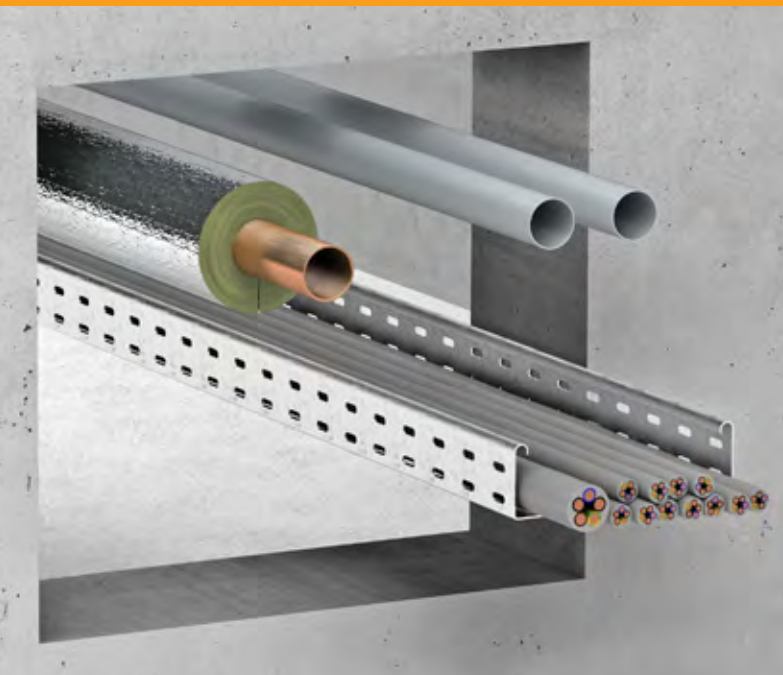

If cables are run through building walls or ceilings, then the fire resistance must be restored with cable insulation. If, in addition, different installations such as electrical cables or sanitary pipes run through the same opening, then combination insulation is used.

on
Block and

Openings in walls or ceiling are closed off quickly using foam blocks and fire protection foam.

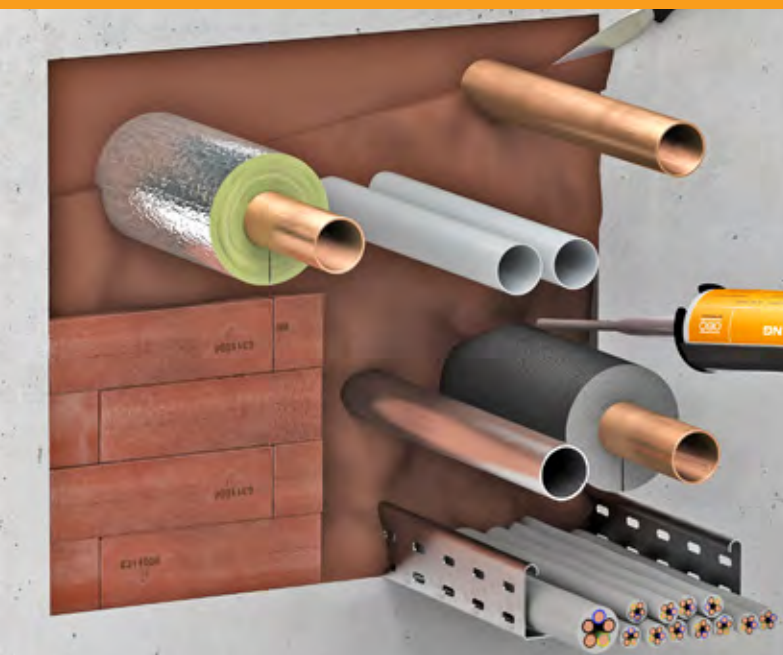

Practical and easy to install: With the PYROPLUG Block foam block and the PYROSIT NG fire protection foam, installers always have a strong team of products on their side, ready to close almost any opening.

Tested and approved, quick and easy.



Detailed
information
on the application,
processing and
documents.

Chalfant Manufacturing Co.
50 Pearl Rd. Brunswick, OH 44212

Customer Service
Tel.: 330-273-3510
Fax: 330-273-8149

www.chalfant-obo.com

Building Connections

